

# Industrial-Grade Media Converter

## GNL-G120SAB

- Transmission Range: 3KM
- Transmission Rate: 1000Mbps
- Power Inout: DC5V1A

## Product Features

- Adapter Power Supply
- Aluminium Alloy Abrasive Material
- Convenient


## Product Figure



## Specifications

Model	GNL-G120SAB
Protocol Standard	IEEE802.3z/ab
Network Interface	RJ45 10/100/1000Mbps Self-Adaption Transmission Distance:100m
Fiber Interface	Single Mode SC Optical Fiber Type:Single Mode 9/125μm 1310T/1550R (A) / 1550T/1310R (B) Transmission Rate:1000Mbps Transmission Distance:≤3KM
Performance & Specification	Forwarding Mode:Store Forward Transfer Mode:Full Duplex/Full Duplex Automatic Connection Network Latency:≤150μs
Power	Power Type:External Power Power Input:AC100V~240V 50/60Hz Power Input:DC5V1A DC Socket:2.5x5.0mm
Physical Specifications	Size:95*70*25mm, Weight: 0.43KG
Working Environment	Operating Temperature: -30°C~75°C Storage Temperature: -30°C~75°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing
Certification	CE FCC RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	Adapter *1 Pair; User Manual; Rack Mounted Earring *1 Pair;

## Dimension (mm)

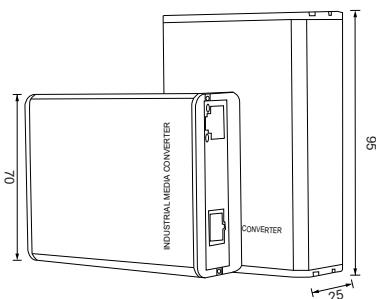

## Installation Diagram

