

## L2 Lite Cloud Managed PoE Switch


### GNT-ES306DH-P

- Total Power 65W
- RJ45 (PoE) Ports \* 4
- 1 port Uplink
- 1 port SFP No-combo

### Product Features

- Support Web Management
- Support VLAN, PoE Management

### Ports Description

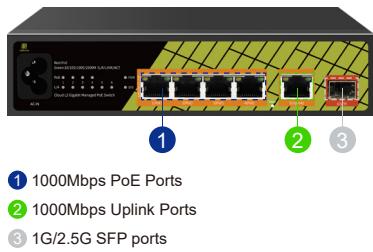


① 1000Mbps PoE Ports  
② 1000Mbps Uplink Ports  
③ 1G/2.5G SFP ports


### Specifications

Model	GNT-ES306DH-P
Port	PoE (1~4):10/100/1000Mbps PoE ports (RJ45) Uplink(5):10/100/1000Mbps uplink ports (RJ45) SFP(6):1G/2.5G No-combo port
Power Supply	Power Input: 100~240V; Total power consumption ≤ 65W;
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX; IEEE 802.3ab 1000BASE-T; IEEE 802.3x Flow Control; IEEE 802.3af/at Power over Ethernet;
Web Management	Factory IP: 10.253.10.253; Default password: admin;
Indicator Light	Per RJ45 Ports: LINK/ACT (Green: 1000/100/10Mbps), PoE (Red)
MAC Address	Support MAC Address Binding; Support MAC Address searching; Support MAC Address Learning;
VLAN	Support 802.1Q VLAN; Support Hybrid VLAN Mode;
Port	Support port Status Display; Support port flow control; Support port speed and Duplex configuration; Support port Adaptive MDI/MDI-X; Support port 250 meters transmission (10Mbps);
DHCP	Support DHCP Client;
Management Features	Support Web-based Management (HTTP); Support Cloud Management;
Switching Capacity	15Gbps
Packet Forwarding Rate	11.2Mpps
MAC Capacity	2K
Flash	16MB
Protection Level	Lightning Protection:6KV; ESD Protection:8KV;

### Dimension (mm)

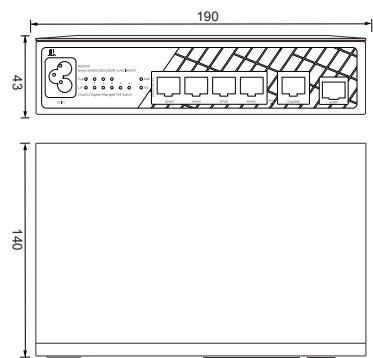

### Installation Diagram



Physical Specifications	Size(L*W*H): 190mm* 140mm* 43mm; Weight: 1.03KG;
Environment	Operating Temperature: -30°C~60°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing
Certification	CE FCC RoHS 2.0
Warranty	1-year Warranty
Package Content	Switch * 1; AC Cable * 1; User Manual * 1