

10G SFP Switch

GNT-ES06XDT2

- Total 7W Power Supply
- 4 ports 2.5G RJ45
- 2 ports 10G SFP

Product Features


- Operating Temperature: -40°C~70°C
- 6KV Lightning & 8KV ESD Protection

Ports Description




- ① 1G/2.5G RJ45 Ports
- ② 10G SFP Ports

Dimension (mm)

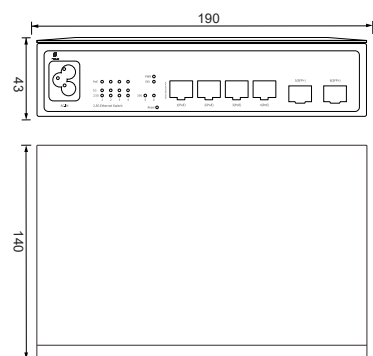

Installation Diagram



Specifications

Model	GNT-ES06XDT2
Ports	RJ45 (1~4):1G/2.5G ports (RJ45) SFP(5~6):10G No-combo port
Transmission Rate	1G/2.5G/10G: Full Duplex Only 10/100Mbps: Full Duplex / Half Duplex
Transmission Distance	130m
Performance Specification	Bandwidth:60Gbps
	Network Latency (1 to 10G): $\leq 16\mu s$ (use the 64byte package size)
	MAC address table: 4K
	Packet Forwarding Rate: 44.6Mpps
Networking Standard	IEEE 802.3i 10BASE-T
	IEEE 802.3u 100BASE-TX
	IEEE 802.3ab 1000BASE-T
	IEEE 802.3x Flow Control
Power Support	Power Input: AC 90~240V Total $\leq 7W$
Protection Level	Lightning Protection:6KV ESD Protection:8KV
Physical Specifications	Size(L*W*H): 190mm*140mm*43mm, Weight:1.03KG
Working Environment	Operating Temperature: -40°C~70°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE
	FCC
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	AC Power Cable,User Manual