

10G SFP Switch

GNT-ES06XDT2-P

- Total 65W Power Supply
- 4 ports 2.5G PoE
- 2 ports 10G SFP

Product Features


- AI Watchdog Function
- Operating Temperature: -40°C~70°C
- 6KV Lightning & 8KV ESD Protection

Ports Description




- ① 1G/2.5G PoE Ports
- ② 10G SFP Port

Dimension (mm)

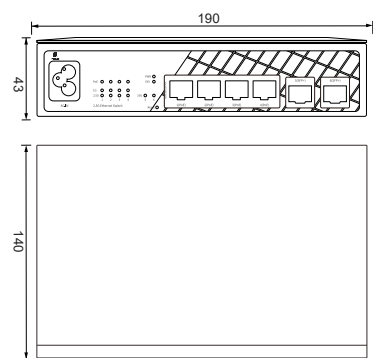

Installation Diagram



Specifications

Model	GNT-ES06XDT2-P
Ports	PoE (1~4):1G/2.5G PoE ports (RJ45) SFP(5~6):10G No-combo ports
Transmission Rate	1G/2.5G/10G: Full Duplex Only 10/100Mbps: Full Duplex / Half Duplex
Transmission Distance	130m
Performance Specification	Bandwidth:60Gbps
	Network Latency (1 to 10G): $\leq 16\mu s$ (use the 64byte package size)
	MAC address table: 4K
	Packet Forwarding Rate: 44.6Mpps
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX
	IEEE 802.3ab 1000BASE-T
	IEEE 802.3x Flow Control
	IEEE 802.3af/at Power over Ethernet
Power Support	Power Input: AC 90~240V Total $\leq 65W$ AI Watchdog: Port 1~4 Power Output: PoE1~4 Port: 1/2(+52V), 3/6(GND) $\leq 30W$
Protection Level	Lightning Protection:6KV ESD Protection:8KV
Physical Specifications	Size(L*W*H): 190mm*140mm*43mm, Weight:1.03KG
Working Environment	Operating Temperature: -40°C~70°C
	Storage Temperature: -40°C~70°C
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE
	FCC
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	AC Power Cable,User Manual