

Optical Splitter - Cascade

GNT-FS05GDP-4

- 1 port Uplink
- 4 ports PoF

Product Features


- Lightning Protection:6KV
- ESD Protection:8KV

Ports Description




- ① 1000Mbps Uplink Ports
- ② 1000Mbps PoF Ports

Dimension (mm)

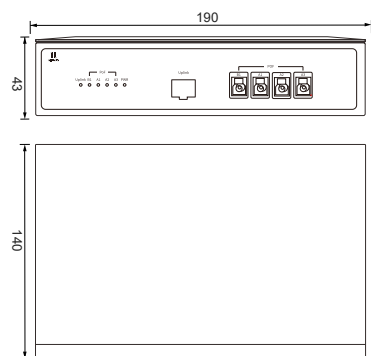

Installation Diagram



Specifications

Model	GNT-FS05GDP-4
Ports	Uplink(1):10/100/1000Mbps uplink ports (RJ45) PoF (B1, A1~A3):1000Mbps SCC Photoelectric composite port single-mode single-core
Transmission Rate	1000Mbps: Full Duplex Only 10/100Mbps: Full Duplex / Half Duplex
Transmission Distance	PoF(B1, A1~A3)ports: Cascade PoF in&out all distance ≤20KM
Bandwidth	10Gbps
Performance Specification	Network Latency (1 to 1000Mbps): = 16us (use the 64byte package size)
	MAC address table: 2K
	7.44Mpps Packet forwarding rate
Networking Standard	IEEE 802.3i 10BASE-T IEEE 802.3ab 100BASE-TX IEEE 802.3x Flow Control
Connection Method	Cascade
Protection Level	Lightning Protection:6KV ESD Protection:8KV
Physical Specifications	Size(L*W*H): 190mm*140mm*43mm, Weight: 1.03KG
Working Environment	Operating Temperature: - 30°C-60°C Storage Temperature: - 30°C-60°C Operating Humidity: 10%-90% Non-condensing Storage Humidity: 5%-90% Non-condensing
Certification	CE FCC RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	Switch * 1; User Manual * 1