

L2 Lite Cloud/Web Managed PoE Switch


GNT-DS112UD-P10

- Total Power 120W
- RJ45 (PoE) Ports * 10
- 2 ports Uplink

Product Features


- Support Cloud/Web Management
- Support MAC Address searching;
- Support port 250 meters transmission (10Mbps);
- Support Locator Flash

Ports Description

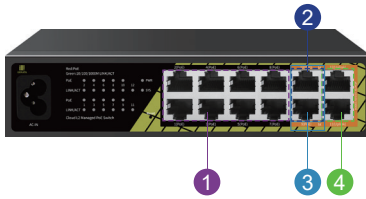


- ① 100Mbps PoE Ports
- ② 1000Mbps PoE Ports
- ③ 60W Power Ports
- ④ 1000Mbps Uplink Ports

Dimension (mm)

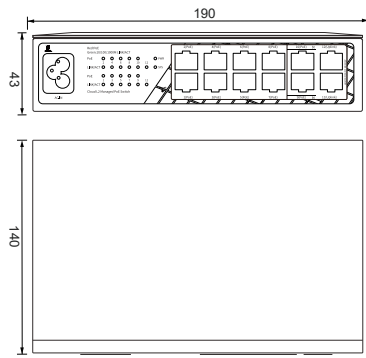

Installation Diagram



Specifications

| | |
|--------------------------|---|
| Model | GNT-DS112UD-P10 |
| Ports | PoE (1~8): 10/100Mbps PoE ports (RJ45) PoE (9~10): 10/100/1000Mbps PoE ports (RJ45), Support bt 60W High Power Uplink (11~12): 10/100/1000Mbps uplink ports (RJ45) |
| Transmission Distance | Port (1~8): 10/100Mbps 130meters; 10Mbps Auto-adaption 250meters Port (9~10): 10/100/1000Mbps 130meters |
| Networking Standard | IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX; IEEE 802.3ab 1000BASE-T; IEEE 802.3x Flow Control; IEEE 802.3af/at Power over Ethernet; |
| Web Management | Factory IP: 10.253.10.253; Default password: admin; |
| Indicator Light | PoE Port: Red Solid (PoE On), Green Blinking (Data) Uplink Port: Green Blinking (Data) |
| MAC Address Management | Support MAC Address searching; Support MAC Address Learning; |
| Port Management Features | Support port Status Display; Support port speed and Duplex configuration; Support port Adaptive MDI/MDI-X; Support port 250 meters transmission (10Mbps); |
| DHCP | Support DHCP Client; |
| Management Features | Support Web-based Management (HTTP); Support Cloud Management; |
| Switching Capacity | 9.6Gbps |
| Packet Forwarding Rate | 7.1Mpps |
| MAC Address Table | 2K |
| Protection Level | Lightning Protection: 6KV; ESD Protection: 8KV; |
| Working Environment | Operating Temperature: 30°C~60°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing |
| Power Supply | Power Input: 100~240V; Total power consumption ≤ 120W; |
| Physical Specifications | 190*140*43mm |
| Certification | CE; FCC; RoPS 2.0 |
| Warranty | 1-year Warran |
| Package Content | Switch*1; AC Cable*1; User Manual*1 |