

# L2 Lite Cloud/Web Managed PoE Switch


## GNT-DS118UD-P

- Total Power 240W
- RJ45 (PoE) Ports \* 16
- 2 ports Uplink

## Product Features


- Support Cloud/Web Management
- Support MAC Address searching;
- Support port 250 meters transmission (10Mbps);
- Support Locator Flash

## Ports Description

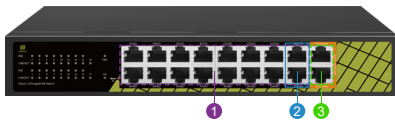


- 1 100Mbps PoE
- 2 100Mbps bt 60W PoE
- 3 1000Mbps Uplink

## Dimension (mm)

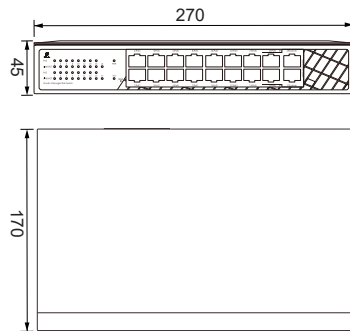

## Installation Diagram



## Specifications

Model	GNT-DS118UD-P
Ports	PoE (1~14):10/100Mbps PoE ports (RJ45) PoE (15~16):10/100Mbps PoE ports (RJ45), Support bt 60W High Power Uplink (17~18):10/100/1000Mbps uplink ports (RJ45)
Transmission Distance	Port (1~16): 10/100Mbps 130meters; 10Mbps Auto-adaption 250meters
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX; IEEE 802.3ab 1000BASE-T; IEEE 802.3x Flow Control; IEEE 802.3af/at Power over Ethernet;
Web Management	Factory IP: 10.253.10.253; Default password: admin;
Indicator Light	PoE Port: Red Solid (PoE On), Green Blinking (Data) Uplink Port: Green Blinking (Data)
MAC Address Management	Support MAC Address searching; Support MAC Address Learning;
Port Management Features	Support port Status Display; Support port speed and Duplex configuration; Support port Adaptive MDI/MDI-X; Support port 250 meters transmission (10Mbps);
DHCP	Support DHCP Client;
Management Features	Support Web-based Management (HTTP); Support Cloud Management;
Switching Capacity	7.2Gbps
Packet Forwarding Rate	5.35Mpps
MAC Address Table	2K
Protection Level	Lightning Protection: 6KV; ESD Protection: 8KV;
Working Environment	Operating Temperature: 30°C~60°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% Non-condensing Storage Humidity: 5%~90% Non-condensing
Power Supply	Power Input: 100~240V; Total power consumption ≤ 240W;
Physical Specifications	270*170*45mm
Certification	CE; FCC; RoPS 2.0
Warranty	1-year Warran
Package Content	Switch*1; AC Cable*1; User Manual*1; 19inch Rack Earring 1 Pair